

AM

Sunnex AM is the classic machine mount with excellent anti-vibration and levelling performance. Designed for a versatile and professional use within industrial and production applications. Proven quality and effective vibration damping with great noise reduction properties.

Sunnex AM mounts are available in stainless steel or zinc plated finish. The stainless-steel mount is designed to meet the specific requirements imposed in humid, wet or corrosive environments within the process.

The built-in levelling bolt allows the Sunnex AM to be vertically adjusted with considerable accuracy, allowing a 7° inclination while still retaining full stability.

Features


- Loads up to 2000kg per machine mount
- Stainless or zinc plated finish
- Nitrile compound
- Integrated bolt with precision levelling

Applications

- Manufacturing industry
- Process industry
- Food, drink and pharmaceutical
- Conveyor belts
- Light and medium duty machines


Benefits

- Excellent anti-vibration
- Precise levelling
- Ideal for inclined surfaces
- Noise reduction

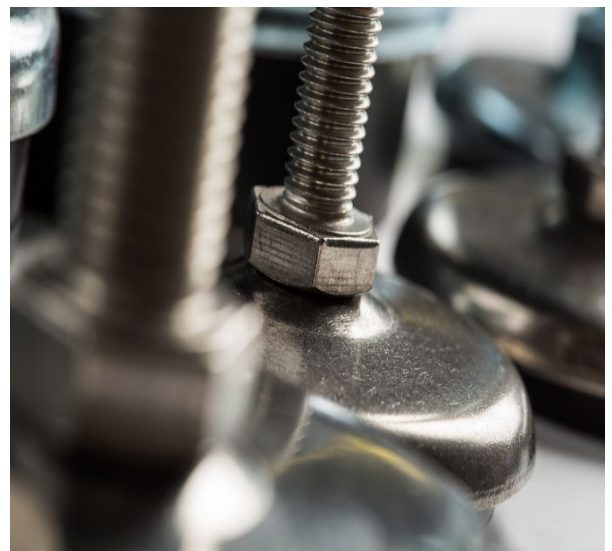

Technical specification AM

Rubber:	Nitrile rubber
Finish:	Stainless or Zinc plated
Load capacity:	50-2000kg
Diameter, D:	68-150mm
Height, H:	100-202mm
Length, L:	100-150mm
Key grip, B:	17-36mm
Inclination:	0-7°

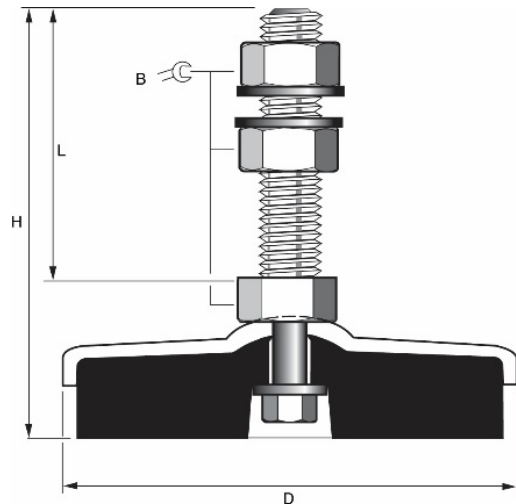

Load range daN (kg)	D mm	L mm	H mm	Levelling bolt	B mm	Part no. Stainless	Part no. Zink plated
50-150	68	100	125	M10 x 1,50	17	10521	10525
		120	146	M12 x 1,75	19	10523	10553
			148	M16 x 2,00	24	10545	10555
			151	M20 x 2,50	30	10547	10557
100-250	68	100	125	M10 x 1,50	17	10522	10526
		120	146	M12 x 1,75	19	10524	10554
			148	M16 x 2,00	24	10546	10556
			151	M20 x 2,50	30	10548	10558
50-500	98	120	158	M12 x 1,75	19	10531	10535
				M16 x 2,00	24	10533	10538
				M20 x 2,50	30	10565	10575
		150	191	M24 x 3,00	36	10567	10577
450-1000	98	120	158	M12 x 1,75	19	10532	10536
				M16 x 2,00	24	10534	10539
				M20 x 2,50	30	10566	10576
		150	191	M24 x 3,00	36	10568	10578
900-1500	140	120	169	M12 x 1,75	19	10620	10640
				M16 x 2,00	24	10621	10641
				M20 x 2,50	30	10622	10642
		150	202	M24 x 3,00	36	10623	10643
1400-2000	140	120	169	M12 x 1,75	19	10630	10650
				M16 x 2,00	24	10631	10651
				M20 x 2,50	30	10632	10652
		150	202	M24 x 3,00	36	10633	10653

*Additional bolt options are available upon request